

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 955 105 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
10.11.1999 Bulletin 1999/45

(21) Application number: 97900784.6

(22) Date of filing: 23.01.1997

(51) Int. Cl.⁶: **B21D 5/02, G05B 19/4097**

(86) International application number:
PCT/JP97/00177

(87) International publication number:
WO 97/30803 (28.08.1997 Gazette 1997/37)

(84) Designated Contracting States:
CH DE FR LI

(30) Priority: 23.02.1996 JP 3682496

(71) Applicants:
• **KOMATSU LTD.**
Minato-ku Tokyo 107 (JP)
• **KOMATSU INDUSTRIES CORPORATION**
Minato-ku, Tokyo 107 (JP)

(72) Inventor: **TAKADA, Masaaki**
Komatsu-shi, Ishikawa 923 (JP)

(74) Representative:
Leson, Thomas Johannes Alois, Dipl.-Ing. et al
Patentanwälte
Tiedtke-Bühling-Kinne & Partner,
Bavariaring 4
80336 München (DE)

(54) **BENDING ORDER SELECTING METHOD IN BENDING MACHINE AND APPARATUS THEREFOR**

(57) A bending order which provides a highest possible bending accuracy is determined.

First, a bending order generating section generates a plurality of bending orders possible for bending operation. Then, whether the bend angle of each bend can be measured in each generated bending order is checked by a measurement judging section. For each bend which has been determined as an objective bend "impossible to measure", a reference bend whose correction value for a die driving amount is to be used for calculating a correction value for the objective bend is set by a correction condition setting section. Weighting is carried out by a weight setting section based on the degree of the correlation between the processing factors of the objective bend and the processing factors of its associated reference bend, and the weights assigned to all the objective bends are summed by a weight sum computing section. Thereafter, a bending order selecting section evaluates the respective weight sums of the bending orders to select a suitable bending order and outputs the evaluation result to an NC device.

EP 0 955 105 A1

Description

Technical Field

5 [0001] The present invention relates to a method and system for determining a bending order to achieve high bending accuracy in producing a plurality of bends in a workpiece, the method and system being well adapted for use in a bending machine in which a correction value for a die driving amount with respect to a first bend is obtained based on measurements of the bend angle thereof and a correction value for a die driving amount with respect to a second bend is calculated from the correction value for the first bend.

10

Background Art

[0002] A known bending machine such as press brakes controls the driving amount of a movable die with an NC device according to various kinds of input information to bend a sheet-like workpiece. However, such die driving amount control cannot always avoid errors in bend angle because of variations in the thickness and properties of workpieces to be bent and in processing conditions. One attempt to solve this problem is designed such that the bend angle of the workpiece is measured during the bending process and the driving amount for the die is corrected based on the in-process measurements thereby to ensure high bending accuracy.

15 [0003] When forming a workpiece into particular shapes, bending machines equipped with such a bend angle measuring means are unable to perform bend angle measurement or encounters difficulties in measurement. In these cases, the bending machines fail in eliminating errors in bend angle.

20 [0004] With a view to overcoming the foregoing drawback, the applicant of the present invention has proposed an automatic die driving amount correction method in Japanese Patent Unexamined Publication No. 7-314043 (1995), according to which a correction value for a die driving amount with respect to a first bend is obtained based on measurements of the bend angle thereof and a correction value for a die driving amount with respect to a second bend is calculated from the correction value for the first bend. This correction method makes it possible to ensure high bending accuracy even if the workpiece has bends the angles of which are difficult or impossible to measure and eliminates the need for conducting angle measurement each time when a bend is produced so that significant savings in processing time can be achieved.

30 [0005] The above automatic die driving amount correction method reveals a problem, that is, its inapplicability to some bends if bending order is not appropriately determined when producing a plurality of bends in a workpiece. In addition, since the bending accuracy of the second bend varies depending on the degree of the correlation between the first and second bends in terms of their processing factors, the highest possible accuracy cannot be achieved with some bending orders.

35 [0006] The invention is directed to overcoming the above problem and one of the objects of the invention is therefore to provide a method and system for determining a bending order to achieve bending accuracy as high as possible in forming a plurality of bends with a bending machine in which if one of the bends has an angle difficult or impossible to measure, a correction amount for this bend is calculated from a correction amount for another bend which has been obtained based on bend angle measurements. Herein, the bend (i.e., first bend) whose correction value for a die driving amount is obtained from measurements of its bend angle is called "reference bend", while the bend (i.e., second bend) whose correction value is calculated from the correction value of the reference bend is called "objective bend".

40

Disclosure of the Invention

45 [0007] According to the invention, there is provided a bending order determining method for a bending machine wherein a correction value for a die driving amount with respect to a reference bend is obtained based on measurements of the bend angle of the reference bend and a correction value for a die driving amount with respect to an objective bend is calculated from the correction value for the reference bend, in producing a plurality of bends in a workpiece,

50 the method comprising selecting a suitable bending order from a plurality of bending orders possible for bending operation, based on evaluation of the bending accuracies of objective bends to be formed in each bending order, the evaluation being carried out with a specified measure.

55 [0008] The invention is directed to selecting a suitable bending order from a plurality of possible bending orders according to the result of evaluation of the respective bending accuracies of bends produced in each of the possible bending orders, the evaluation being made based on a specified measure. Each bend evaluated is an objective bend to be formed with a correction value for a die driving amount which is calculated from a correction value for a die driving amount for a reference bend which is calculated based on measurements of the bend angle of the reference bend.

According to the invention, a suitable bending order for achieving the highest possible bending accuracy is thus determined from a plurality of possible bending orders, based on the evaluation of the bending accuracies of bends produced in each of the possible bending orders, which contributes to an improvement in the accuracy of the bending operation.

[0009] Preferably, the evaluation with a specified measure is carried out such that a weight is assigned to the bending accuracy of each of the objective bends formed in each bending order, based on the degree of the correlation between the processing factors of the objective bend and the processing factors of its associated reference bend, and then the weights assigned to all the objective bends with respect to each bending order are summed to obtain an evaluation value for each bending order. This enables high-accuracy bending operation because the evaluation of the bending accuracies of bends produced in each bending order is carried out in consideration of the degree of the correlation between objective and reference bends in terms of processing factors. In this case, the suitable bending order to be selected is preferably a bending order which has the best evaluation value.

[0010] According to the invention, there is provided a bending order determining system for a bending machine wherein a correction value for a die driving amount with respect to a reference bend is obtained based on measurements of the bend angle of the reference bend and a correction value for a die driving amount with respect to an objective bend is calculated from the correction value for the reference bend, in producing a plurality of bends in a workpiece, the system comprising:

- (a) bending order generating means for generating a plurality of bending orders possible for bending operation;
- (b) measurement judging means for checking whether bend angle measurement can be made for each bend in each bending order generated by the bending order generating means;
- (c) correction condition setting means for setting a reference bend for each bend which has been determined by the measurement judging means as an objective bend the bend angle of which is impossible to measure;
- (d) evaluation value computing means for computing an evaluation value for each bending order in such a way that the bending accuracy of each objective bend determined to be impossible to measure is assigned a weight, based on the degree of the correlation between the processing factors of the objective bend and its associated reference bend set by the correction condition setting means and the weights assigned to all the objective bends are summed to obtain the evaluation value; and
- (e) bending order selecting means for selecting a suitable bending order from the plurality of bending orders based on the evaluation values computed by the evaluation value computing means.

[0011] According to the invention, a suitable bending order is selected from a plurality of possible bending orders through the following procedure. A plurality of bending orders possible for bending operation are first generated and then a judgement is made to check whether the bend angle of each bend can be measured in each possible bending order. For each objective bend, that is, the bend which has been determined to be "impossible to measure", a reference bend is set, the reference bend having a correction value for a die driving amount which is to be used for calculating a correction value for a driving amount for its associated objective bend. Thereafter, based on the degree of the correlation between the processing factors of the objective bend and the processing factors of its associated reference bend which has been set, the bending accuracy of the objective bend is weighted. Sequentially, the weights assigned to all the objective bends of each bending order are summed to obtain an evaluation value for the bending order. Based on the evaluation values of all the possible bending orders thus determined, a suitable bending order is finally selected. In this way, the bending accuracy of each bending order is evaluated in consideration of the correlation between bends in terms of processing factors. This brings about easy input of step data into the NC device and increases the accuracy of the bending operation. In this case, it is desired that the bending order selecting means select a bending order having the best evaluation value as the suitable bending order.

Brief Description of the Drawings

[0012]

FIGURE 1 is a diagram of a system structure designed according to one embodiment of the invention. FIGURES 2(a) and 2(b) are, a perspective view and end view respectively, showing one example of workpieces processed in the embodiment. FIGURE 3 shows one example of cases where bend angle measurement cannot be made. FIGURE 4 shows another example of cases where bend angle measurement cannot be made. FIGURE 5 is a flow chart of processing performed by a bending order determining system. FIGURE 6 shows one example of bending orders possible for bending the workpiece shown in FIGURE 2. FIGURE 7 shows another example of bending orders possible for bending the workpiece shown in FIGURE 2. FIGURES 8(a) and 8(b) are a perspective view and end view respectively, showing another example of workpieces

processed in the embodiment.

FIGURE 9 shows one example of bending orders possible for bending the workpiece shown in FIGURE 8.

FIGURE 10 shows another example of bending orders possible for bending the workpiece shown in FIGURE 8.

FIGURE 11 shows a bend angle measuring unit used in another embodiment.

Best Mode for Carrying out the Invention

[0013] With reference to the drawings, there will be explained a method and system for determining a bending order adapted for use with a bending machine, according to a preferred embodiment of the invention.

[0014] FIGURE 1 shows a system structure according to one embodiment of the invention.

[0015] In the present embodiment, a press brake 1 comprises a lower die (die) 3 supported on a mount 2 and an upper die (punch) 5 that is arranged in opposing relationship with the lower die 3, being attached to the underside of a ram 4. The ram 4 is so disposed as to be lifted and lowered above the lower die 3. Inserted between the lower die 3 and the upper die 5 is a workpiece W formed from a metal sheet. Bending of the workpiece W is performed by lowering the ram 4 to press the workpiece W placed on the lower die 3 with both lower and upper dies 3, 5.

[0016] In front of the mount 2 (i.e., on the user side) and behind the mount 2 (i.e., on the machine side), there are provided angle measuring units 8 each comprising a slit-shaped light source 6 for projecting a linear light image onto the outer surface of the bent workpiece W and a CCD camera 7 for picking up the linear light image formed by the light source 6. The angle measuring units 8 measure the bend angle of the workpiece W. Such an angle measuring unit 8 may be positioned in front of or behind the mount 2 only.

[0017] The image picked up by the CCD camera 7 is displayed on a monitor television (not shown) while it is processed as image data in a bend angle computing section 9. The bend angle computing section 9 computes the bend angle of the workpiece W and the result of this arithmetic operation is input into an NC device 10. Apart from this measurement data representative of the bend angle of the workpiece W, the NC device 10 inputs, beforehand, workpiece information (material, the length of a bend line, bend angle, etc.), die information (die height, V-groove width, V-angle, punch R, etc.) and machine information (rigidity, speed specification, stroke specification, etc.).

[0018] The NC device 10 computes a reference lower limit of the stroke of the ram 4 (i.e., reference bend depth) based on input data such as the aforesaid workpiece information, die information, and machine information, and based on the result of this arithmetic operation, the ram 4 is controlled to perform bending operation. During the bending operation, the actual bend angle of the workpiece W is calculated in the bend angle computing section 9 and the result is input into the NC device 10. Based on this input data, the NC device 10 calculates a correction value (depth correction value) for the lower limit of the ram 4 and this depth correction value is added to the aforesaid reference bend depth to obtain a final bend depth. According to the final bend depth thus obtained, the ram 4 is driven.

[0019] In actual bending operation, there are some bends for which bend angle measurement cannot be made. For example, when producing a bent article 11 having a plurality of bends a to e as shown in FIGURE 2, bend angle measurement cannot be made for some bends since (i) both surfaces which form the bend (i.e., the faces on both sides of the bend line) in the workpiece W cannot be measured (see FIGURE 3) or (ii) slit lights from the light sources 6 cannot reach the measuring points (see FIGURE 4). Whether bending angle measurement is possible for each bend does not depend on the shape of the bent article 11 but depends on the bending order, that is, the order of producing bends. A depth correction value for a bend for which bend angle measurement is impossible must be calculated from data on another bend for which bend angle measurement has been made. Therefore, the present embodiment includes a bending order determining system 12 (see FIGURE 1) for selecting a suitable bending order which provides a high bending accuracy from a plurality of possible bending orders according to a specified evaluation measure. The arithmetic data produced by the bending order determining system 12 is input into the NC device 10.

[0020] The bending order determining system 12 comprises (a) a processing factor specifying section 13 for specifying processing factors for grouping by selecting from the data sent from the NC device 10, the processing factors being data that influence the bend angle of the workpiece W such as a target bend angle, the length of a bend line (L_1 , L_2), the geometry of the upper die (punch R, angle, height, shape), and the geometry of the lower die (V-width, V-angle, height); (b) a bend grouping section 14 for grouping bends according to the processing factors specified by the processing factor specifying section 13; (c) a bending order generating section 15 for generating bending orders possible for bending operation; (d) a measurement judging section for checking whether bend angle measurement can be made for each bend in each bending order generated by the bending order generating section 15; (e) a correction condition setting section 17 for setting a reference bend for each bend which has been determined by the measurement judging section as an objective bend the bend angle of which is impossible to measure, in order that a correction value for a die driving amount for the reference bend is to be used to calculate a correction value for a die driving amount for its associated objective bend; (f) a weight setting section 18 for assigning a weight to each objective bend, based on the degree of the correlation between the processing factors of the objective bend and the processing factors of the reference bend set by the correction condition setting section 17; (g) a weight sum computing section 19 for calculating the sum of the

weights assigned to all the objective bends according to outputs from the correction condition setting section 17 and from the weight setting section 18; and (h) a bending order selecting section 20 for selecting a suitable bending order from the plurality of possible bending orders by evaluating the weight sums of the plurality of possible bending orders calculated by the weight sum computing section 19. The bending order selecting section 20 releases output data to the NC device 10 and a display unit (not shown) incorporated in the NC device 10 displays the suitable bending order.

[0021] Next, the flow of processing performed by the bending order determining system 12 will be explained with reference to the flow cart of FIGURE 5.

S1: The processing factor specifying section 13 specifies processing factors that influence bend angle (e.g., target bend angle, the length of a bend line, the geometry of the upper die and the geometry of the lower die).

S2: The bends of an article are classified into groups by the bend grouping section 14. Taking the bent article 11 shown in FIGURE 2 for example, the bends are classified into three groups, namely, GROUP (G1) constituted by the bends a, b; GROUP (G2) constituted by the bend c; and GROUP (G3) constituted by the bends d, e. Specifically, the bends a, b have the same target bend angle and the same bend line length L_1 . The bends d, e also have the same target bend angle and the same bend line length L_2 . When weighting (described later) is carried out, a weight is obtained from the correlation between two groups made by the above classification. This arrangement facilitates weighting calculation even if there exist many bends which have the same correlation with their associated bends. It should be noted that such classification is not essential but may be omitted.

S3 to S4: The bending order generating section 15 generates a plurality of bending orders possible for bending operation and the following processing is sequentially performed on each bending order. By way of example, bending orders for the bent article 11 shown in FIGURE 2 are shown in FIGURES 6 and 7. For simplicity of explanation, the two kinds of bending orders shown in FIGURES 6 and 7 are evaluated in this flow. First, processing is performed on the bending order of FIGURE 6.

S5: The measurement judging means 16 makes a check to determine whether the angle of each bend can be measured in the bending order of FIGURE 6. In this case, it is determined that accurate bend angle measurement cannot be made in Bending Step 1 (i.e., the bend a) and Bending Step 3 (i.e., the bend e) because both surfaces which constitute the bend a or e cannot be measured. Also, Bending Step 5 (i.e., the bend c) is determined to be "impossible to measure" for the reason that slit lights from the light sources 6 cannot reach the measuring points of the bend c.

TABLE 1

BENDING STEP (ORDER)	BEND TARGET BEND ANGLE	BEND LINE LENGTH	GROUP	MEASUREMENT	REFERENCE BENDING STEP		REFERENCE BENDING STEP	
					SETTING PROCESS I		SETTING PROCESS II	
					REFERENCE BENDING STEP	WEIGHT	REFERENCE BENDING STEP	WEIGHT
1	a	700	G1	IMPOSSIBLE	NONE	100	NONE	100
2	b	700	G1	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
3	e	500	G3	IMPOSSIBLE	BENDING STEP 2	2	BENDING STEP 2	2
4	d	500	G3	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
5	c	700	G2	IMPOSSIBLE	BENDING STEP 2	60	BENDING STEP 4	60+2
SUM OF WEIGHTS					162		164	
MINIMUM WEIGHT SUM					162		162	

S6: The correction condition setting section 17 sets a reference bending step for each bending step which has been determined as an objective bending step for which bend angle measurement is impossible (Bending Steps 1, 3 and

5 are objective bending steps in this embodiment). In this example, there is no bend for which bend angle measurement is made prior to Bending Step 1 and therefore the column "REFERENCE BENDING STEP" in "REFERENCE BENDING STEP SETTING PROCESS I" of TABLE 1 corresponding to Bending Step 1 appears to be "NONE". Regarding Bending Steps 3 and 5, the column "REFERENCE BENDING STEP" in "REFERENCE BENDING STEP SETTING PROCESS I" appears to be "Bending Step 2".

5
10
15
20
S7: The weight setting section 18 reads preset weighting data based on the degree of the correlation between objective and reference bends in terms of processing factors (target bend angle, bend line length, upper die geometry, lower die geometry, etc.). This preset weighting data is experimental data prepared in such a way: bending operation is performed with various degrees of the correlation between the processing factors of a reference bending step and the processing factors of an objective bending step and the extent of an error in the bend angle in the objective bending step of each case is taken as data. TABLE 2 shows one example of the preset weighting data. In TABLE 2, the weight is set to increase as the extent of the error increases. In other words, the weight increases as the accuracy of bending based on a calculated correction value decreases. Since an error in bend angle is greater than an error in bend line length, the weight assigned to target bend angle is set greater than the weight assigned to bend line length. Here, the weight is set to 100 when there is no correlation (that is, an objective bending step does not have its associated reference bending step). The weight for the correlation between objective and reference bending steps in terms of target bend angle is set to be equal to the difference between the target bend angle of the reference bending step and the target bend angle of the objective bending step, whereas the weight for the correlation in terms of bend line length is set to be equal to the ratio between the bend line length of the reference bending step and the bend line length of the objective bending step.

TABLE 2

CORRECTION OF PROCESSING FACTORS	WEIGHT	NOTE
NONE (NO REFERENCE BENDING STEP IS SET)	100	
TARGET BEND ANGLE	THE VALUE OF $ \theta^\circ - \theta'^\circ $ (EXAMPLE: WHEN $\theta = 100^\circ$ AND $\theta' = 90^\circ$, THE VALUE IS 10)	θ° : TARGET BEND ANGLE OF OBJECTIVE BENDING STEP θ'° : TARGET BEND ANGLE OF REFERENCE BENDING STEP
BEND LINE LENGTH	0	$RH = L_2 / L_1$ or L_1 / L_2
$1 < RH \leq 2$	2	L_2 : BEND LINE LENGTH OF OBJECTIVE BENDING STEP
$2 < RH \leq 3$	3	L_1 : BEND LINE LENGTH OF REFERENCE BENDING STEP
.	.	
.	.	
.	.	
.	.	

S8 to S9: The weight sum computing section 19 calculates a weight for each objective bending step from the correlation between the objective bending step and the associated reference bending step and sums weights for all the bending steps. In the case of TABLE 1, Bending Step 1 does not have an associated reference bending step

and therefore the weight to be assigned to Bending Step 1 is 100. Regarding Bending Step 3, the ratio of the bend line length of the reference step (i.e., Bending Step 2) for Bending Step 3 to the bend line length of Bending Step 3 is $700/500 = 1.2$ so that the weight for Bending Step 3 is 2. Regarding Bending Step 5, the difference in target bend angle between Bending Step 5 and its associated reference bending step (i.e., Bending Step 2) is $150^\circ - 90^\circ = 60^\circ$ and therefore the weight for Bending Step 5 is 60. Accordingly, the sum of the weights assigned to all the bending steps is $100 + 2 + 60 = 162$.

S10: If setting of a reference bending step is changed, the program returns to step S6 and another setting process different from REFERENCE BENDING STEP SETTING PROCESS I, that is, REFERENCE BENDING STEP SETTING PROCESS II is carried out. According to REFERENCE BENDING SETTING PROCESS II, Bending Steps 1 to 4 respectively have the same associated reference bending steps as those in REFERENCE BENDING STEP SETTING PROCESS I but Bending Step 5 has, as its associated reference bending step, Bending Step 4 which differs from that of SETTING PROCESS I. A weight to be assigned to Bending Step 5 is similarly calculated according to REFERENCE BENDING STEP SETTING PROCESS II. Concretely, the ratio of the bend line length of Bending Step 5 to the bend line length of Bending step 4 is $700/500 = 1.2$ and the difference in target bend angle between these steps is $150^\circ - 90^\circ = 60^\circ$ so that the weight is $2 + 60 = 62$. The sum of all the weights is $100 + 2 + 62 = 164$.

S11: The minimum weight sum is selected from the respective weight sums of the reference bending step setting processes. In this example, the minimum weight sum is 162 because $162 < 164$.

S12 to S13: If the minimum weight sums of all the bending orders have not been obtained yet, the program performs the processing of Step S5 and onward on the next bending order. For example, when the next bending order is as shown in FIGURE 7, four kinds of reference bending step setting processes are adapted (see TABLE 3) and calculation of weights is carried out for each of REFERENCE BENDING STEP SETTING PROCESSES I to IV in the same way as described earlier. As a result, the weight sums of REFERENCE BENDING STEP SETTING PROCESSES I, II, III, IV are 2, 62, 62 and 122, respectively and the minimum weight sum is accordingly 2.

TABLE 3

BENDING STEP (ORDER)	BEND STEP	TARGET BEND ANGLE	BEND LINE LENGTH	GROUP	MEASUREMENT	REFERENCE BENDING STEP SETTING PROCESS I		REFERENCE BENDING STEP SETTING PROCESS II		REFERENCE BENDING STEP SETTING PROCESS III		REFERENCE BENDING STEP SETTING PROCESS IV	
						REFERENCE BENDING STEP	WEIGHT	REFERENCE BENDING STEP	WEIGHT	REFERENCE BENDING STEP	WEIGHT	REFERENCE BENDING STEP	WEIGHT
1	c	150°	700	G2	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
2	b	90°	700	G1	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
3	a	90°	700	G1	IMPOSSIBLE	BENDING STEP 2	0	BENDING STEP 2	0	BENDING STEP 1	60	BENDING STEP 1	60
4	e	90°	500	G3	IMPOSSIBLE	BENDING STEP 2	2	BENDING STEP 1	60+2	BENDING STEP 2	2	BENDING STEP 1	60+2
5	d	90°	500	G3	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
SUM OF WEIGHTS						2	62	62	62	62	122	MINIMUM WEIGHT SUM	
												2	

S14: The bending order having the smallest minimum weight sum (in this example, REFERENCE BENDING STEP SETTING PROCESS I of the bending order shown in FIGURE 7 has the smallest minimum sum) is selected from

all the bending orders. The bending order thus selected is displayed as a suitable bending order by the display unit incorporated in the NC device 10. In one example of displaying methods, all the bending orders may be displayed on one display screen in the order of their increasing minimum weight sums. Alternatively, one bending order is displayed on one screen and the screens each having one bending order appear in the order of the increasing minimum weight sums whenever the operator switches, by depressing a button. In both cases, the operator looks at the display and proceeds operation according to the steps indicated by the NC device 10. It should be noted that the operator can select other bending orders than the bending order selected through the calculation.

[0022] Next, there will be explained another example in which two bending orders are evaluated for the bent article 21 shown in FIGURE 8.

[0023] In the case of the bending order shown in FIGURE 9, Bending Steps 2 (Bend i), 4 (Bend k) and 5 (Bend m) are "impossible to measure" as seen from the column "MEASUREMENT" in TABLE 4, because accurate bend angle measurement cannot be made as both surfaces forming each bend cannot be measured. Four kinds of reference bending step setting processes (REFERENCE BENDING STEP SETTING PROCESSES I to IV) are provided for setting reference bending steps for the above "impossible to measure" bending steps. According to each reference bending step setting process, a weight for each objective bending step is calculated based on the correlation between the objective bending step and its associated reference bending step and calculated weights for all the bending steps are summed. The weight sums of REFERENCE BENDING STEP SETTING PROCESSES I to IV are 24, 12, 16 and 4, respectively. Therefore, the minimum weight sum of this bending order is 4.

TABLE 4

BENDING STEP (ORDER)	BEND TARGET ANGLE	BEND LINE LENGTH	GROUP	MEASUREMENT	REFERENCE BENDING STEP		REFERENCE BENDING STEP		REFERENCE BENDING STEP		REFERENCE BENDING STEP	
					SETTING PROCESS I		SETTING PROCESS II		SETTING PROCESS III		SETTING PROCESS IV	
					REFERENCE BENDING STEP	WEIGHT	REFERENCE BENDING STEP	WEIGHT	REFERENCE BENDING STEP	WEIGHT	REFERENCE BENDING STEP	WEIGHT
1	j	100°	G1	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
2	i	100°	G2	IMPOSSIBLE	BENDING STEP 1	2	BENDING STEP 1	2	BENDING STEP 1	2	BENDING STEP 1	2
3	l	90°	G4	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
4	k	90°	G3	IMPOSSIBLE	BENDING STEP 1	10	BENDING STEP 1	10	BENDING STEP 3	2	BENDING STEP 3	2
5	m	90°	G4	IMPOSSIBLE	BENDING STEP 1	10+2	BENDING STEP 3	0	BENDING STEP 1	10+2	BENDING STEP 3	0
SUM OF WEIGHTS					24		12		16		4	
											MINIMUM WEIGHT SUM	
											4	

[0024] Similarly, in the case of the bending order shown in FIGURE 10, the weight sums of the two reference bending step setting processes (REFERENCE BENDING STEP SETTING PROCESSES I and II) are 112 and 104, respectively, as seen from TABLE 5. Therefore the minimum weight sum of this bending order is 104. Accordingly, REFERENCE

BENDING STEP SETTING PROCESS IV of the bending order shown in FIGURE 9 is selected as the bending order having the smallest minimum weight sum in this example.

TABLE 5

BENDING STEP (ORDER)	BEND BEND ANGLE	BEND LINE LENGTH	GROUP	MEASUREMENT	REFERENCE BENDING STEP SETTING PROCESS I		REFERENCE BENDING STEP SETTING PROCESS II	
					REFERENCE BENDING STEP	WEIGHT	REFERENCE BENDING STEP	WEIGHT
1	m	700	G4	IMPOSSIBLE	NONE	100	NONE	100
2	k	1000	G3	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
3	l	700	G4	IMPOSSIBLE	BENDING STEP 2	2	BENDING STEP 2	2
4	i	500	G2	POSSIBLE	BENDING STEP OF ITSELF	0	BENDING STEP OF ITSELF	0
5	j	1000	G1	IMPOSSIBLE	BENDING STEP 2	10	BENDING STEP 4	2
SUM OF WEIGHTS					112	MINIMUM WEIGHT SUM		
						104		104

[0025] Although the sum of weights is used as an evaluation value for indicating the degree of bending accuracy in the present embodiment, the evaluation may be carried out in other ways. For instance, the bending steps which are expected to have the poorest bending accuracy, for example, the "impossible to measure" bending steps which do not have their associated reference bending steps (in the present embodiment, the bending steps having a weight of 100) are assigned Δ and the number of bending steps having Δ in each bending order (the sum of Δ s) is calculated for evaluation.

[0026] While the present embodiment is designed such that as the weight increases, the bending accuracy of bending performed with a calculated correction value decreases, the bending accuracy may increase as the weight increases.

[0027] While cases where only one of the surfaces constituting a bend can be measured and where slit lights from the light sources are interrupted by the workpiece W so that they cannot reach the measuring positions are taken as examples of cases where the bend is determined to be an objective bend "impossible to measure", other situations may be included. For example, in cases where the workpiece has holes or notches through which slit lights permeate, without reaching a bend, this bend may be regarded as an objective bend.

[0028] In the present invention, a suitable bending order determined by the bending order determining system 12 is displayed on the display unit of the NC device 10 and the operator operates the bending machine to move or reverse the workpiece W, while looking at the displayed information. An alternative embodiment may be arranged such that information is issued to the handling system of a robot etc. based on the data released from the bending order determining system 12 to the NC device 10 in order to automatically handle the workpiece W.

[0029] Although the bend angle measuring unit of the present embodiment comprises slit light sources and CCD cameras for picking up a linear projected light image and obtains bend angle through image processing, the measuring unit is not limited to this type but other types may be employed. For instance, a contact type measuring unit may be used, in which displacement gauges 23 each operated by an air cylinder 22 are disposed and the bend angle of the workpiece W is measured by bringing the contacts of the displacement gauges 23 into contact with the outer surfaces of the workpiece W as shown in FIGURE 11. Another alternative type employs a plurality of distance sensors (overcurrent sensors, capacitance sensors or the like) to measure the distance from each sensor to the workpiece and obtains the differences between the distances thereby measuring the bend angle of the workpiece.

[0030] Although the embodiment described herein has been discussed in the context of a press brake of the so-called over drive type which has a fixed lower die and a movable upper die and corrects the lower limit of the stroke of the ram for driving the upper die, the invention is equally applicable to a press brake of the so-called under drive type which has a fixed upper die and a movable lower die. In the case of the under drive type, correction is made, of course, on the upper limit of the stroke of the ram for driving the lower die.

[0031] The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

Claims

1. A bending order determining method for a bending machine wherein a correction value for a die driving amount with respect to a reference bend is obtained based on measurements of the bend angle of the reference bend and a correction value for a die driving amount with respect to an objective bend is calculated from the correction value for the reference bend, in producing a plurality of bends in a workpiece,

the method comprising selecting a suitable bending order from a plurality of bending orders possible for bending operation, based on evaluation of the bending accuracies of objective bends to be formed in each bending order, the evaluation being carried out with a specified measure.

2. A bending order determining method for a bending machine according to claim 1, wherein said evaluation with a specified measure is carried out such that a weight is assigned to the bending accuracy of each of objective bends formed in each bending order, based on the degree of the correlation between the processing factors of the objective bend and the processing factors of its associated reference bend, and then the weights assigned to all the objective bends with respect to each bending order are summed to obtain an evaluation value for each bending order.
3. A bending order determining method for a bending machine according to claim 2, wherein the suitable bending order to be selected is a bending order which has the best evaluation value.
4. A bending order determining system for a bending machine wherein a correction value for a die driving amount with respect to a reference bend is obtained based on measurements of the bend angle of the reference bend and a

correction value for a die driving amount with respect to an objective bend is calculated from the correction value for said reference bend, in producing a plurality of bends in a workpiece, the system comprising:

- 5 (a) bending order generating means for generating a plurality of bending orders possible for bending operation;
- (b) measurement judging means for checking whether bend angle measurement can be made for each bend in each bending order generated by the bending order generating means;
- (c) correction condition setting means for setting a reference bend for each bend which has been determined by the measurement judging means as an objective bend the bend angle of which is impossible to measure;
- 10 (d) evaluation value computing means for computing an evaluation value for each bending order in such a way that the bending accuracy of each objective bend determined to be impossible to measure is assigned a weight, based on the degree of the correlation between the processing factors of the objective bend and its associated reference bend set by the correction condition setting means and the weights assigned to all the objective bends are summed to obtain the evaluation value; and
- 15 (e) bending order selecting means for selecting a suitable bending order from the plurality of bending orders based on the evaluation values computed by the evaluation value computing means.

5. A bending order determining system for a bending machine according to claim 4, wherein the bending order selecting means selects the bending order having the best evaluation value as the suitable bending order.

20

25

30

35

40

45

50

55

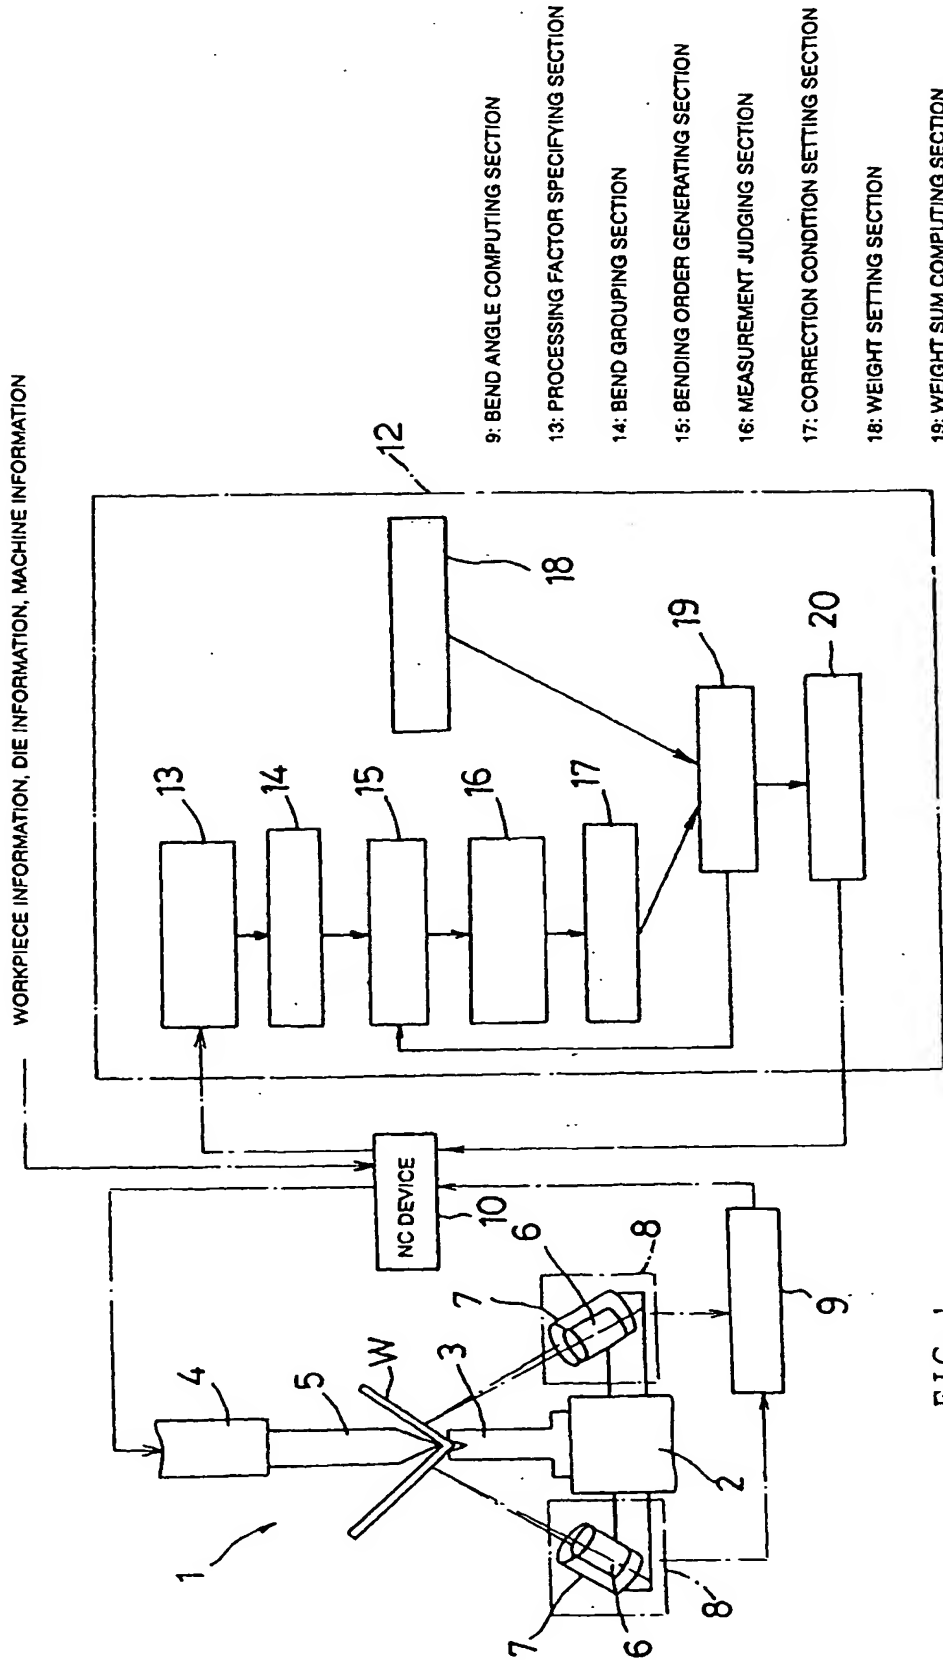


FIG. 1

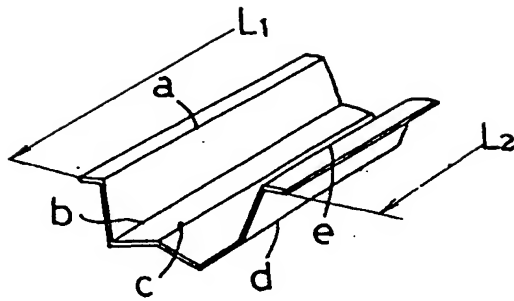


FIG. 2 (a)




FIG. 2 (b)

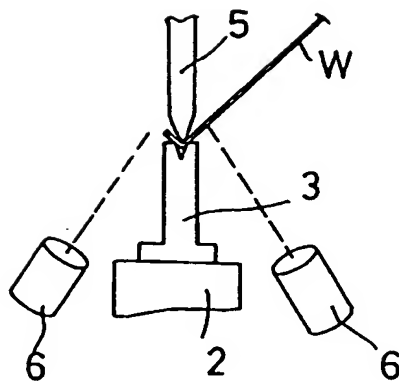


FIG. 3

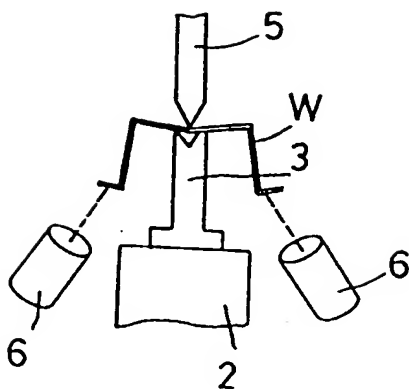


FIG. 4

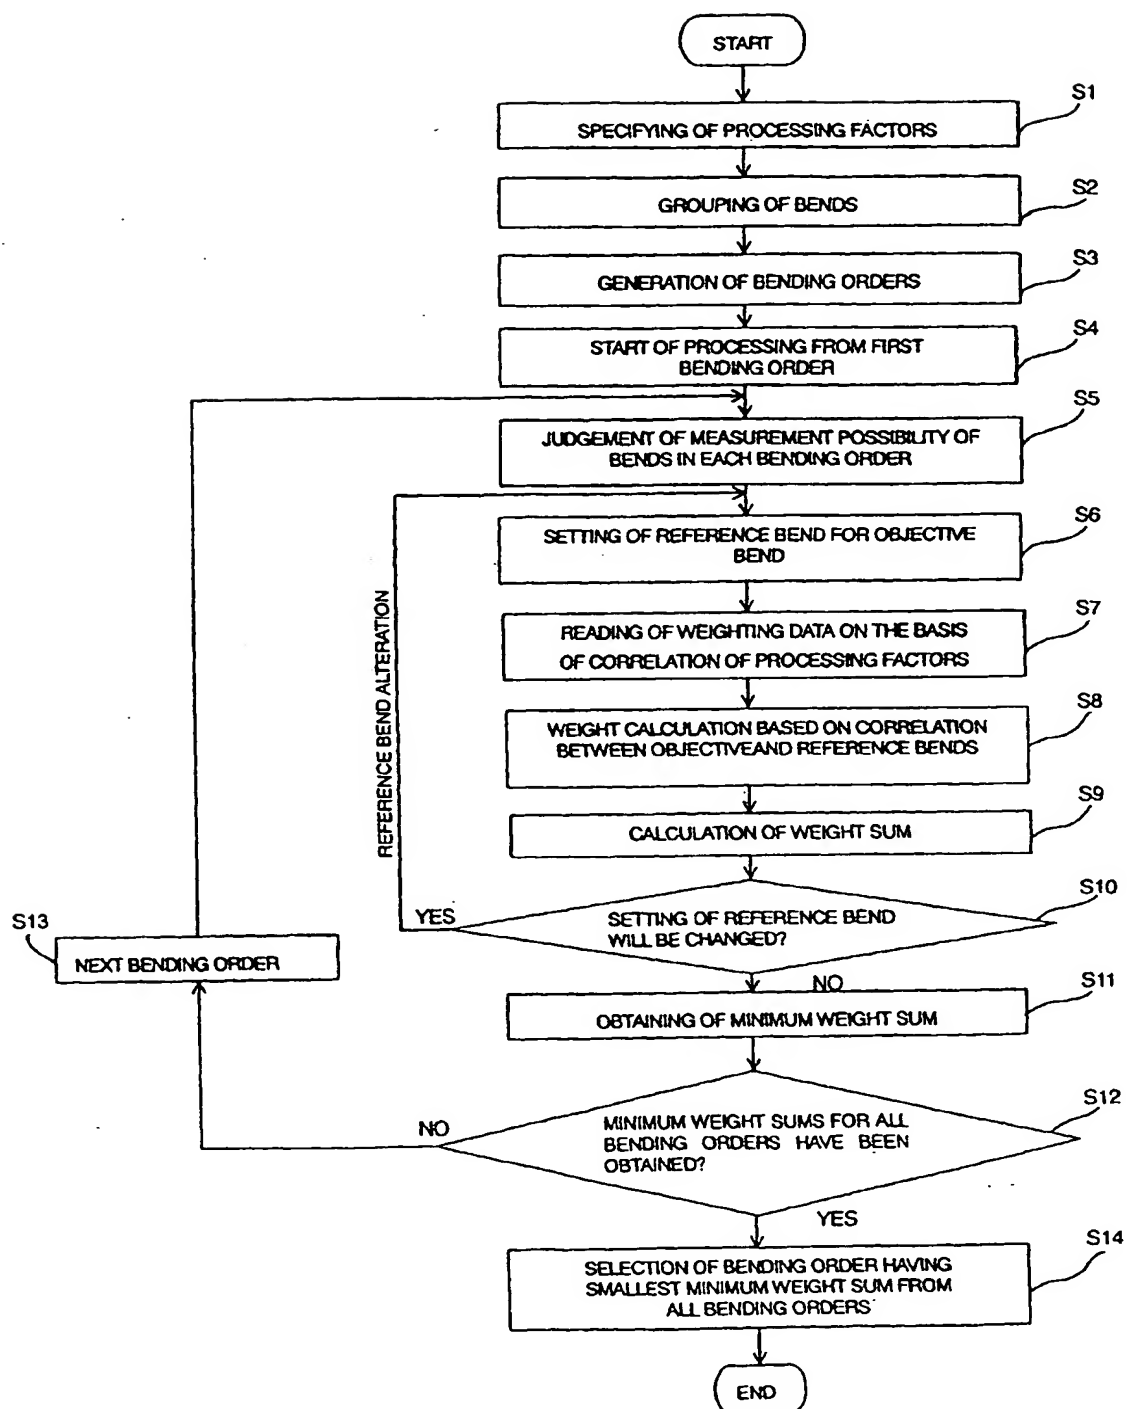


FIG. 5

BENDING STEPS (ORDER)

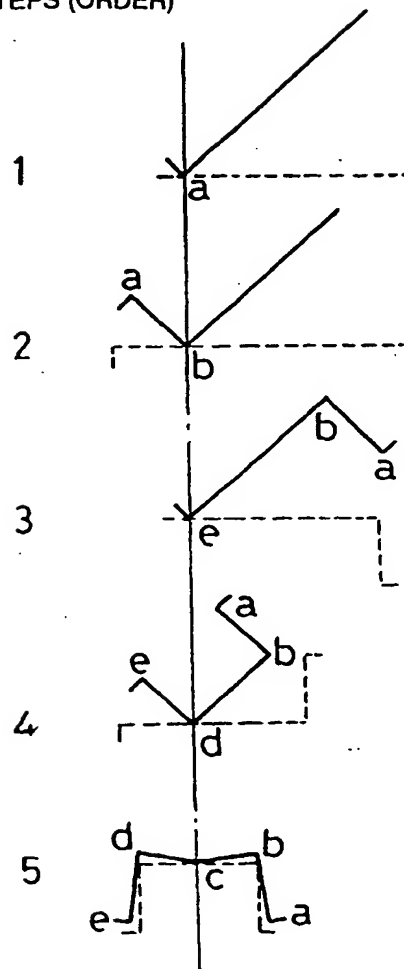


FIG. 6

BENDING STEPS (ORDER)

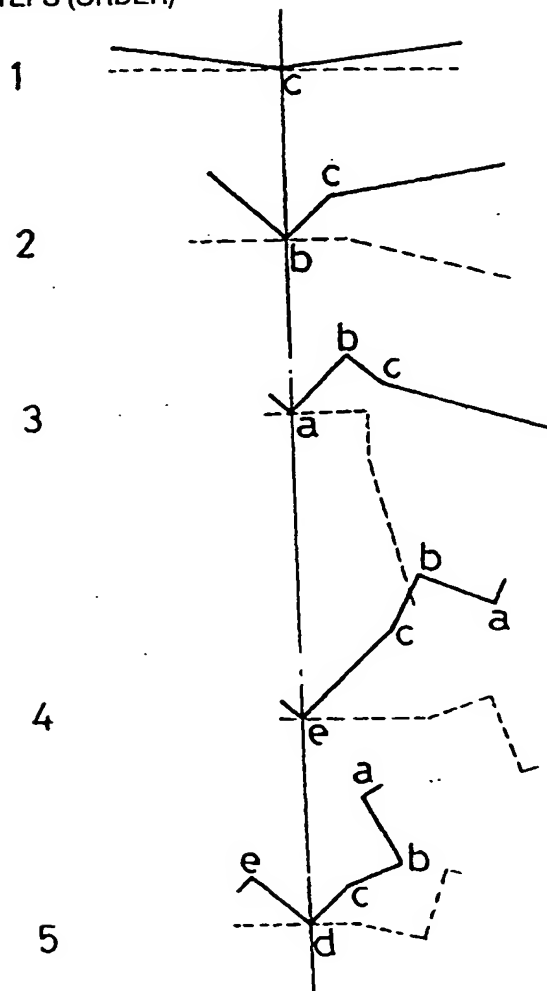


FIG. 7

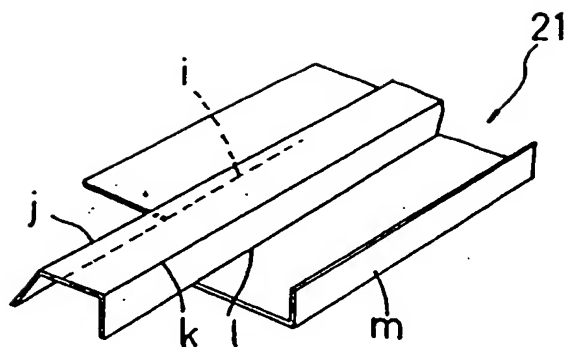


FIG. 8 (a)




FIG. 8 (b)

BENDING STEPS (ORDER)

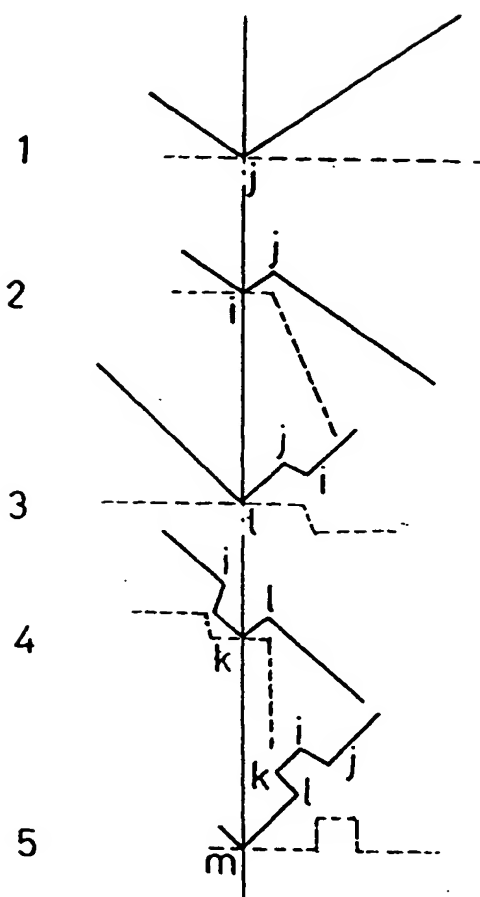


FIG. 9

BENDING STEPS (ORDER)

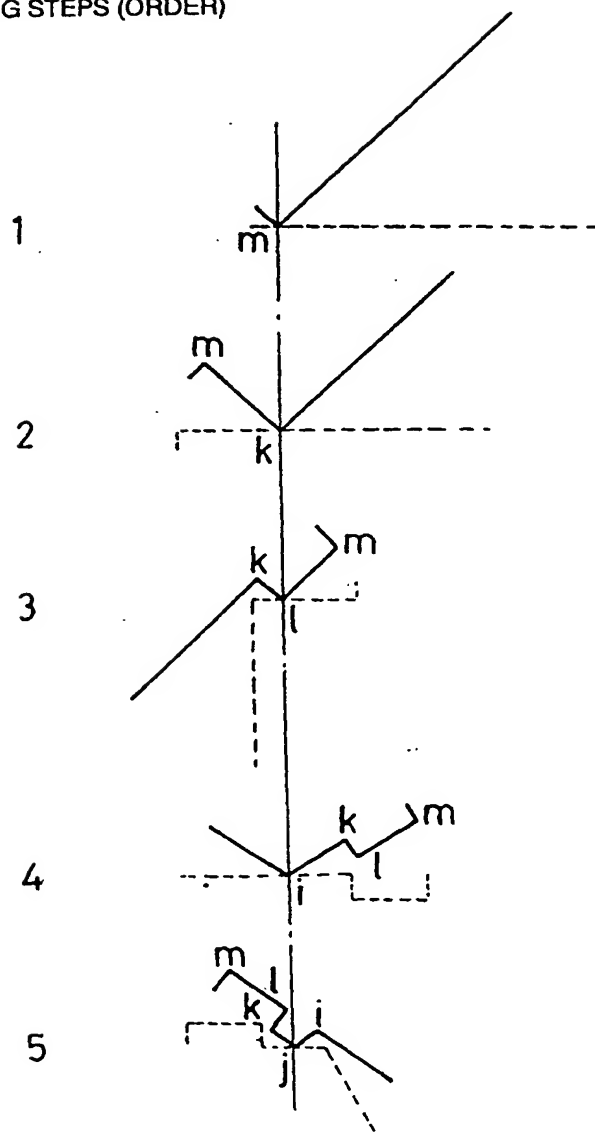


FIG. 10

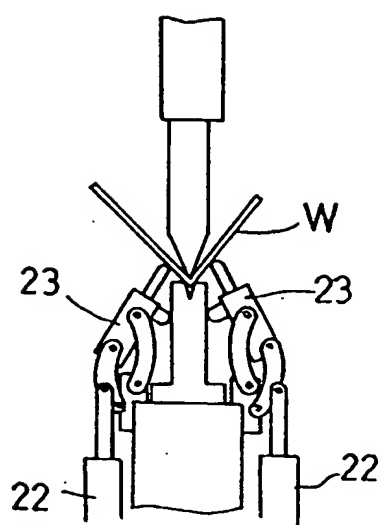


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP97/00177

A. CLASSIFICATION OF SUBJECT MATTER Int. Cl ⁶ B21D5/02 According to International Patent Classification (IPC) or to both national classification and IPC											
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) Int. Cl ⁶ B21D5/02 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926 - 1997 Jitsuyo Shinan Toroku Kokai Jitsuyo Shinan Koho 1971 - 1997 Koho 1996 - 1997 Toroku Jitsuyo Shinan Koho 1994 - 1997 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)											
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>JP, 07-314043, A (Komatsu Ltd.), December 5, 1995 (05. 12. 95) & WO, 9526240, A1 & TW, 281648, A & EP, 752290, A1</td> <td>1 - 5</td> </tr> <tr> <td>A</td> <td>JP, 06-142768, A (Komatsu Ltd.), May 24, 1994 (24. 05. 94) (Family: none)</td> <td>1 - 5</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	A	JP, 07-314043, A (Komatsu Ltd.), December 5, 1995 (05. 12. 95) & WO, 9526240, A1 & TW, 281648, A & EP, 752290, A1	1 - 5	A	JP, 06-142768, A (Komatsu Ltd.), May 24, 1994 (24. 05. 94) (Family: none)	1 - 5
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.									
A	JP, 07-314043, A (Komatsu Ltd.), December 5, 1995 (05. 12. 95) & WO, 9526240, A1 & TW, 281648, A & EP, 752290, A1	1 - 5									
A	JP, 06-142768, A (Komatsu Ltd.), May 24, 1994 (24. 05. 94) (Family: none)	1 - 5									
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.											
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family											
Date of the actual completion of the international search April 18, 1997 (18. 04. 97)		Date of mailing of the international search report April 30, 1997 (30. 04. 97)									
Name and mailing address of the ISA/ Japanese Patent Office Facsimile No.		Authorized officer Telephone No.									

Form PCT/ISA/210 (second sheet) (July 1992)

This Page Blank (uspto)